


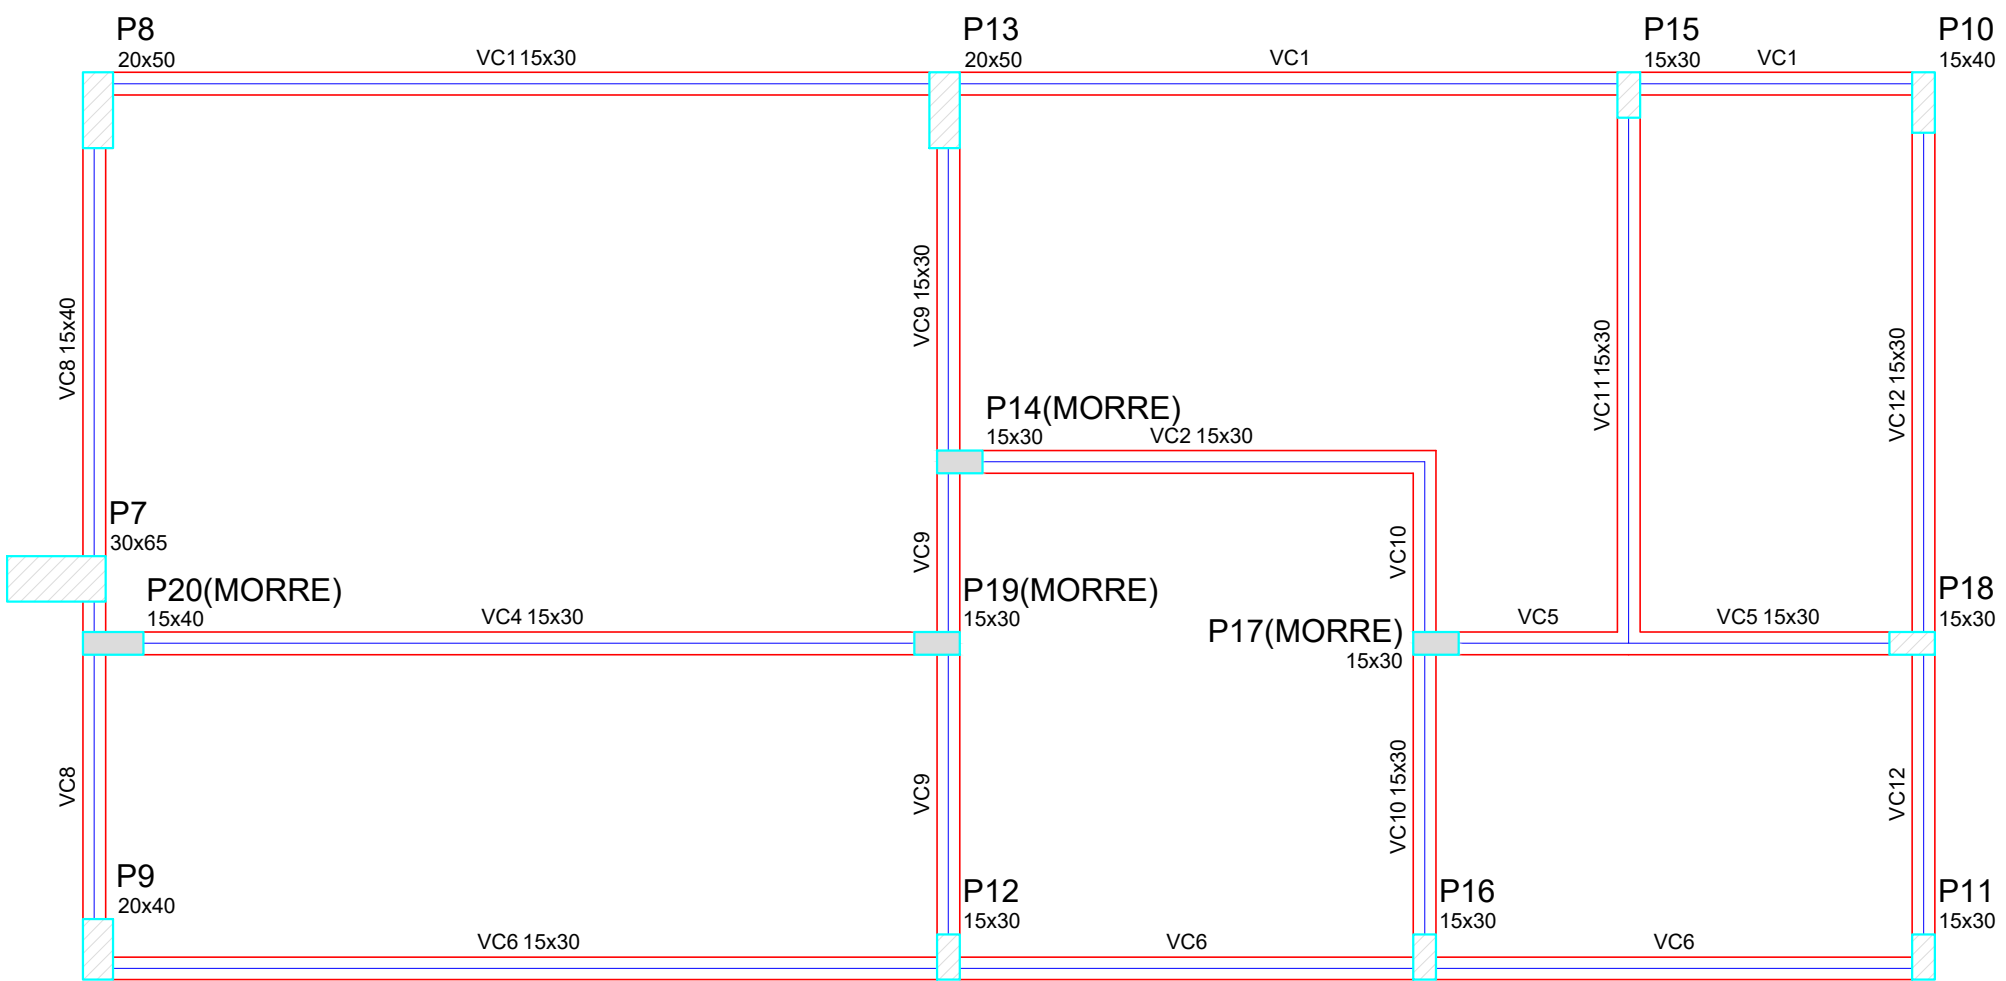

Legenda dos Pilares	
	Pilar que morre
	Pilar que passa
	Pilar que nasce
	Pilar com mudança de seção

AÇO	DIAM	C.TOTAL (m)	PESO + 10 % (kg)
CA50	6.3	1.2	0.3
	8.0	263.8	114.5
	10.0	72.9	49.4
	12.5	26.8	28.3
CA60	5.0	490.9	83.2
PESO TOTAL			
CA50		192.5	
CA60		83.2	

Vol. de concreto total (C-30) = 4.47 m³
 Área de forma total = 63.76 m²

The image displays a series of architectural drawings for a building facade, organized into two rows. The top row contains vertical sections VC1 through VC6, and the bottom row contains VC7 through VC12. Each section is a detailed cross-section of the facade, showing the profile of the building's exterior, including windows, doors, and structural elements. The drawings include dimensions, material specifications, and structural details.

VC1 ESC 1:50

2 N13 ø8.0 C=171 (1c)
1 N12 ø8.0 C=121 (1c)
2 N1 ø5.0 C=280
2 N14 ø8.0 C=150 (1c)
2 N15 ø8.0 C=129 (1c)
2 N10 ø8.0 C=1023 (1c)
2 N11 ø8.0 C=211 (1c)
2 N16 ø8.0 C=325 (1c)
2 N17 ø8.0 C=359 (1c)
2 N18 ø8.0 C=321 (1c)
2 N19 ø8.0 C=546 (1c)
2 N20 ø8.0 C=575 (1c)
2 N21 ø8.0 C=188 (1c)
2 N22 ø8.0 C=128 (1c)
2 N23 ø8.0 C=129 (1c)
2 N24 ø8.0 C=184 (1c)
2 N25 ø8.0 C=340 (1c)
2 N26 ø8.0 C=357 (1c)
2 N27 ø8.0 C=888 (1c)
2 N28 ø8.0 C=338 (1c)
2 N29 ø8.0 C=409 (1c)
2 N30 ø8.0 C=595 (1c)
2 N31 ø10.0 C=263 (1c)
2 N32 ø12.5 C=290 (1c)
2 N33 ø8.0 C=218 (1c)
2 N34 ø12.5 C=668 (1c)
2 N35 ø8.0 C=280 (1c)
2 N36 ø8.0 C=367 (1c)
2 N37 ø8.0 C=388 (1c)
2 N38 ø8.0 C=108 (1c)
2 N39 ø8.0 C=398 (1c)
2 N40 ø8.0 C=113 (1c)
2 N41 ø10.0 C=128 (1c)
2 N42 ø10.0 C=173 (1c)
2 N43 ø10.0 C=182 (1c)
2 N44 ø10.0 C=805 (1c)
2 N45 ø10.0 C=871 (1c)
2 N46 ø10.0 C=871 (1c)
2 N47 ø10.0 C=945 C=375
2 N48 ø10.0 C=871 (1c)
2 N49 ø10.0 C=158 (1c)
2 N50 ø10.0 C=218 (1c)
2 N51 ø10.0 C=263 (1c)
2 N52 ø12.5 C=598 (1c)
2 N53 ø12.5 C=598 (1c)
2 N54 ø12.5 C=668 (1c)
2 N55 ø10.0 C=218 (1c)
2 N56 ø10.0 C=263 (1c)
2 N57 ø10.0 C=263 (1c)
2 N58 ø10.0 C=263 (1c)
2 N59 ø10.0 C=263 (1c)
2 N60 ø10.0 C=263 (1c)
2 N61 ø10.0 C=263 (1c)
2 N62 ø10.0 C=263 (1c)
2 N63 ø10.0 C=263 (1c)
2 N64 ø10.0 C=263 (1c)
2 N65 ø10.0 C=263 (1c)
2 N66 ø10.0 C=263 (1c)
2 N67 ø10.0 C=263 (1c)
2 N68 ø10.0 C=263 (1c)
2 N69 ø10.0 C=263 (1c)
2 N70 ø10.0 C=263 (1c)
2 N71 ø10.0 C=263 (1c)
2 N72 ø10.0 C=263 (1c)
2 N73 ø10.0 C=263 (1c)
2 N74 ø10.0 C=263 (1c)
2 N75 ø10.0 C=263 (1c)
2 N76 ø10.0 C=263 (1c)
2 N77 ø10.0 C=263 (1c)
2 N78 ø10.0 C=263 (1c)
2 N79 ø10.0 C=263 (1c)
2 N80 ø10.0 C=263 (1c)
2 N81 ø10.0 C=263 (1c)
2 N82 ø10.0 C=263 (1c)
2 N83 ø10.0 C=263 (1c)
2 N84 ø10.0 C=263 (1c)
2 N85 ø10.0 C=263 (1c)
2 N86 ø10.0 C=263 (1c)
2 N87 ø10.0 C=263 (1c)
2 N88 ø10.0 C=263 (1c)
2 N89 ø10.0 C=263 (1c)
2 N90 ø10.0 C=263 (1c)
2 N91 ø10.0 C=263 (1c)
2 N92 ø10.0 C=263 (1c)
2 N93 ø10.0 C=263 (1c)
2 N94 ø10.0 C=263 (1c)
2 N95 ø10.0 C=263 (1c)
2 N96 ø10.0 C=263 (1c)
2 N97 ø10.0 C=263 (1c)
2 N98 ø10.0 C=263 (1c)
2 N99 ø10.0 C=263 (1c)
2 N100 ø10.0 C=263 (1c)
2 N101 ø10.0 C=263 (1c)
2 N102 ø10.0 C=263 (1c)
2 N103 ø10.0 C=263 (1c)
2 N104 ø10.0 C=263 (1c)
2 N105 ø10.0 C=263 (1c)
2 N106 ø10.0 C=263 (1c)
2 N107 ø10.0 C=263 (1c)
2 N108 ø10.0 C=263 (1c)
2 N109 ø10.0 C=263 (1c)
2 N110 ø10.0 C=263 (1c)
2 N111 ø10.0 C=263 (1c)
2 N112 ø10.0 C=263 (1c)
2 N113 ø10.0 C=263 (1c)
2 N114 ø10.0 C=263 (1c)
2 N115 ø10.0 C=263 (1c)
2 N116 ø10.0 C=263 (1c)
2 N117 ø10.0 C=263 (1c)
2 N118 ø10.0 C=263 (1c)
2 N119 ø10.0 C=263 (1c)
2 N120 ø10.0 C=263 (1c)
2 N121 ø10.0 C=263 (1c)
2 N122 ø10.0 C=263 (1c)
2 N123 ø10.0 C=263 (1c)
2 N124 ø10.0 C=263 (1c)
2 N125 ø10.0 C=263 (1c)
2 N126 ø10.0 C=263 (1c)
2 N127 ø10.0 C=263 (1c)
2 N128 ø10.0 C=263 (1c)
2 N129 ø10.0 C=263 (1c)
2 N130 ø10.0 C=263 (1c)
2 N131 ø10.0 C=263 (1c)
2 N132 ø10.0 C=263 (1c)
2 N133 ø10.0 C=263 (1c)
2 N134 ø10.0 C=263 (1c)
2 N135 ø10.0 C=263 (1c)
2 N136 ø10.0 C=263 (1c)
2 N137 ø10.0 C=263 (1c)
2 N138 ø10.0 C=263 (1c)
2 N139 ø10.0 C=263 (1c)
2 N140 ø10.0 C=263 (1c)
2 N141 ø10.0 C=263 (1c)
2 N142 ø10.0 C=263 (1c)
2 N143 ø10.0 C=263 (1c)
2 N144 ø10.0 C=263 (1c)
2 N145 ø10.0 C=263 (1c)
2 N146 ø10.0 C=263 (1c)
2 N147 ø10.0 C=263 (1c)
2 N148 ø10.0 C=263 (1c)
2 N149 ø10.0 C=263 (1c)
2 N150 ø10.0 C=263 (1c)
2 N151 ø10.0 C=263 (1c)
2 N152 ø10.0 C=263 (1c)
2 N153 ø10.0 C=263 (1c)
2 N154 ø10.0 C=263 (1c)
2 N155 ø10.0 C=263 (1c)
2 N156 ø10.0 C=263 (1c)
2 N157 ø10.0 C=263 (1c)
2 N158 ø10.0 C=263 (1c)
2 N159 ø10.0 C=263 (1c)
2 N160 ø10.0 C=263 (1c)
2 N161 ø10.0 C=263 (1c)
2 N162 ø10.0 C=263 (1c)
2 N163 ø10.0 C=263 (1c)
2 N164 ø10.0 C=263 (1c)
2 N165 ø10.0 C=263 (1c)
2 N166 ø10.0 C=263 (1c)
2 N167 ø10.0 C=263 (1c)
2 N168 ø10.0 C=263 (1c)
2 N169 ø10.0 C=263 (1c)
2 N170 ø10.0 C=263 (1c)
2 N171 ø10.0 C=263 (1c)
2 N172 ø10.0 C=263 (1c)
2 N173 ø10.0 C=263 (1c)
2 N174 ø10.0 C=263 (1c)
2 N175 ø10.0 C=263 (1c)
2 N176 ø10.0 C=263 (1c)
2 N177 ø10.0 C=263 (1c)
2 N178 ø10.0 C=263 (1c)
2 N179 ø10.0 C=263 (1c)
2 N180 ø10.0 C=263 (1c)
2 N181 ø10.0 C=263 (1c)
2 N182 ø10.0 C=263 (1c)
2 N183 ø10.0 C=263 (1c)
2 N184 ø10.0 C=263 (1c)
2 N185 ø10.0 C=263 (1c)
2 N186 ø10.0 C=263 (1c)
2 N187 ø10.0 C=263 (1c)
2 N188 ø10.0 C=263 (1c)
2 N189 ø10.0 C=263 (1c)
2 N190 ø10.0 C=263 (1c)
2 N191 ø10.0 C=263 (1c)
2 N192 ø10.0 C=263 (1c)
2 N193 ø10.0 C=263 (1c)
2 N194 ø10.0 C=263 (1c)
2 N195 ø10.0 C=263 (1c)
2 N196 ø10.0 C=263 (1c)
2 N197 ø10.0 C=263 (1c)
2 N198 ø10.0 C=263 (1c)
2 N199 ø10.0 C=263 (1c)
2 N200 ø10.0 C=263 (1c)
2 N201 ø10

APROVAÇÃO: _____

OBRA: PROJETO PARQUE DE EXPOSIÇÕES

CONTEÚDO:

Planta de Forma nível 476
Detalhes Vigas Cobertura**AREA DO TERRENO:**

Area Total 43.072,00m

PROP.: MUNICÍPIO DE FORMOSO - GO

R.T.: ENG^o. CIVIL:
GILSON PABLO DIAS VIANA
CREA 1014042577/D-GO

Desenho: GP ENGENHARIA	Tipo: Infraestrutura	Data: Junho / 2026	Escala: Indicada
----------------------------------	--------------------------------	------------------------------	----------------------------