
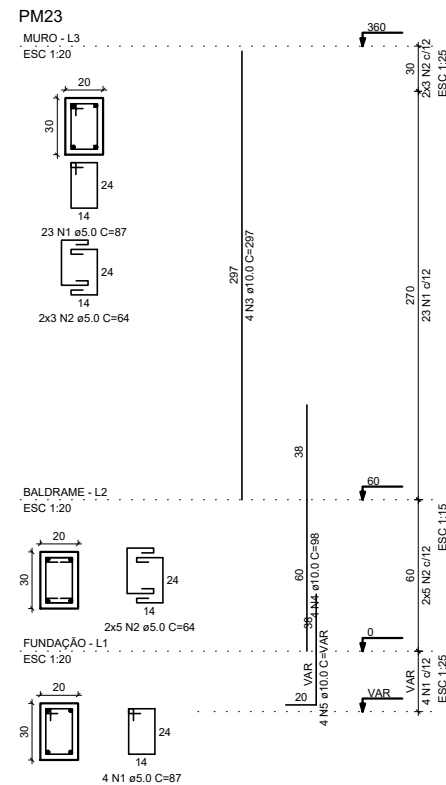
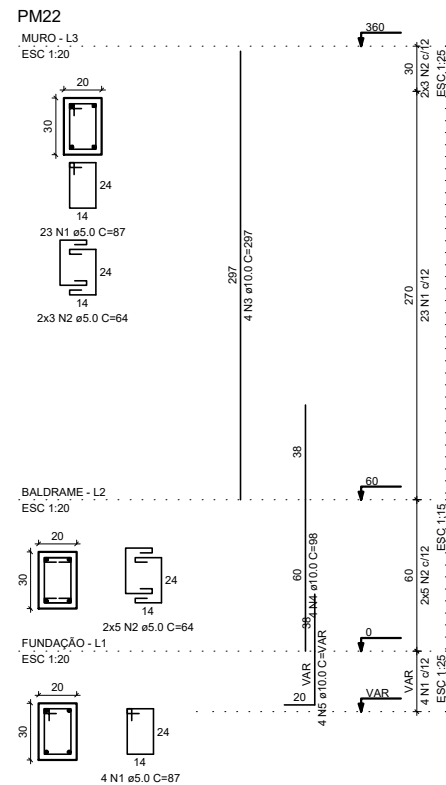


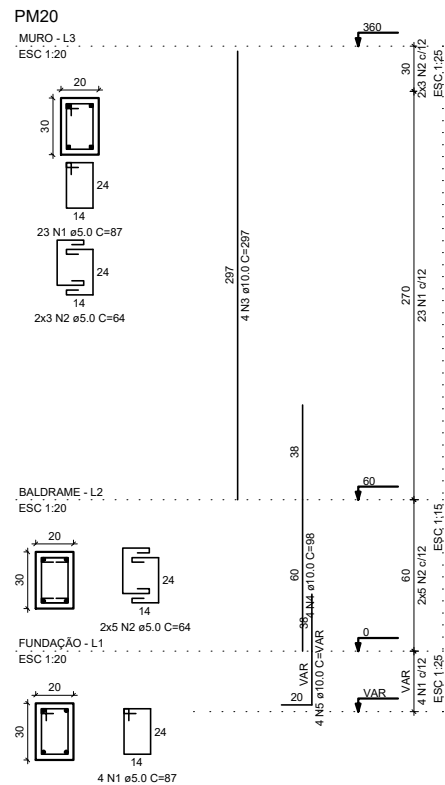

RESUMO DO AÇO

AÇO	N	DIAM (mm)	QUANT	C.UNIT (cm)	C.TOTAL (cm)
CA60	1	5.0	139	87	12093
	2	5.0	80	64	5120
CA50	3	10.0	20	297	5940
	4	10.0	20	98	1960
	5	10.0	20	VAR	VAR

Volume de concreto (C-30) = 0.90 m³
 Volume de concreto (C-25) = 0.30 m³
 Área de forma = 20.00 m²

 PREFEITURA MUNICIPAL DE FORMIGA C.N.P.J. : 16.784.720/0001-25 Secretaria de Obras e Trânsito (37) 3329-1846 secretariafgadeobrasetransito@gmail.com Rua: Cel. José Gonçalves D'Amarante, nº 83, Centro - Formiga MG			
Titulo: PROJETO ESTRUTURAL			
Finalidade: CONSTRUÇÃO UBS CENTRO			
Detalhes: PILARES - MURO			
Proprietário: PREFEITURA DE FORMIGA = CNPJ: 16.784.720/0001-25			
Resp. Técnico: FLORENCY MARIA VIERA			
Escala: INDICADA	Desenho: FLORENCY	Data: FEV/2024	Prancha: 01 / 01