



BACKSHEET MONOCRYSTALLINE MODULE

Preliminary

Mono Multi Ref 3804132-1

PRODUCT: TSM-DE19R

PRODUCT RANGE: 555-580W

580W


MAXIMUM POWER OUTPUT

0~+5W

POSITIVE POWER TOLERANCE

21.5%

MAXIMUM EFFICIENCY

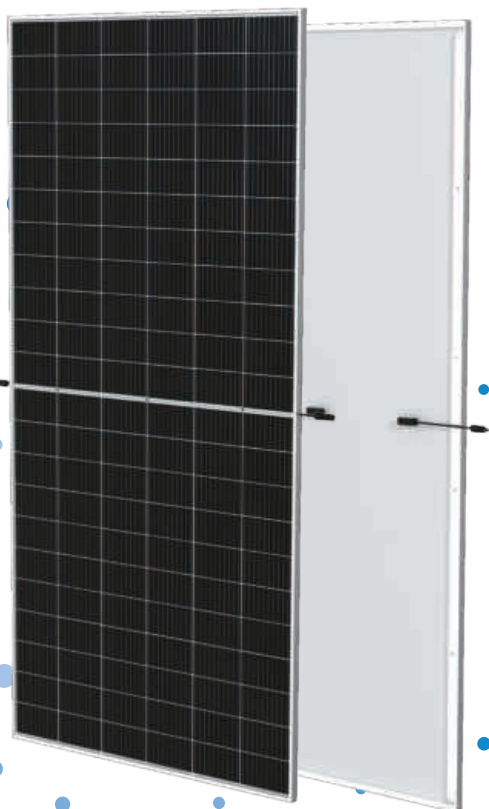

High customer value

- Lower LCOE (Levelized Cost Of Energy), reduced BOS (Balance of System) cost, shorter payback time
- Lowest guaranteed first year and annual degradation;
- Designed for compatibility with existing mainstream system components
- Higher return on Investment



High power up to 580W

- Up to 21.5% module efficiency with high density interconnect technology
- Multi-busbar technology for better light trapping effect, lower series resistance and improved current collection



High reliability


- Minimized micro-cracks with innovative non-destructive cutting technology
- Ensured PID resistance through cell process and module material control
- Mechanical performance up to 5400 Pa positive load and 2400 Pa negative load



High energy yield

- Excellent IAM (Incident Angle Modifier) and low irradiation performance, validated by 3rd party certifications
- The unique design provides optimized energy production under inter-row shading conditions
- Lower temperature coefficient (-0.34%) and operating temperature

Trina Solar's Backsheet Performance Warranty

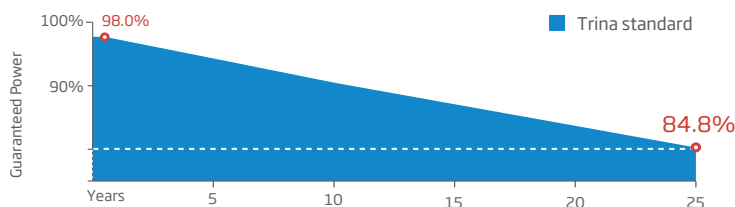


Comprehensive Products and System Certificates




IEC61215/IEC61730/IEC61701/IEC62716/UL61730
ISO 9001: Quality Management System
ISO 14001: Environmental Management System
ISO14064: Greenhouse Gases Emissions Verification
ISO45001: Occupational Health and Safety Management System




DIMENSIONS OF PV MODULE(mm)

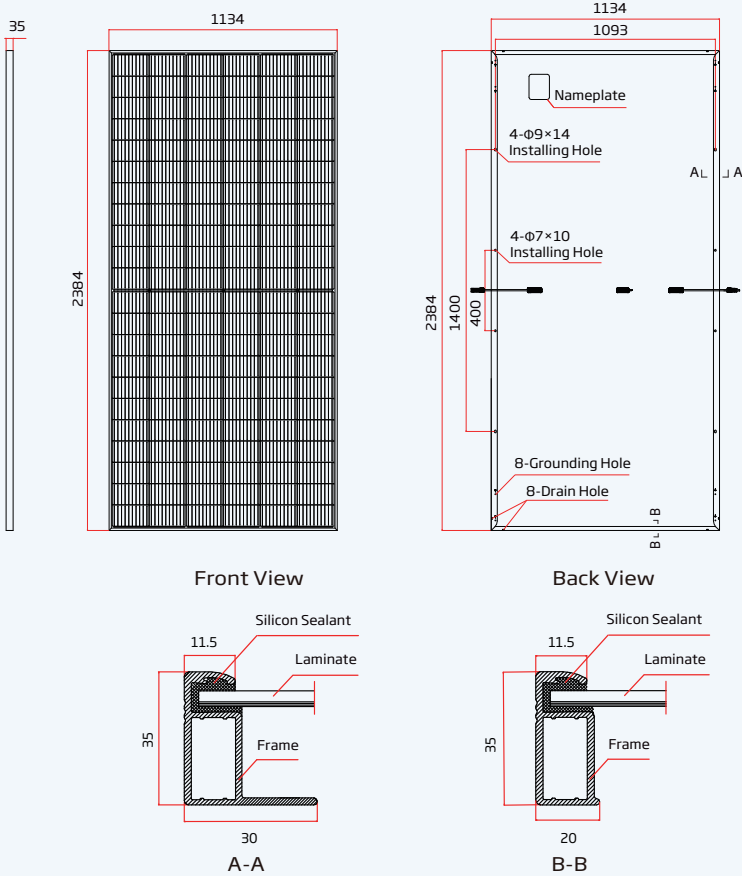

I-V CURVES OF PV MODULE(565 W)

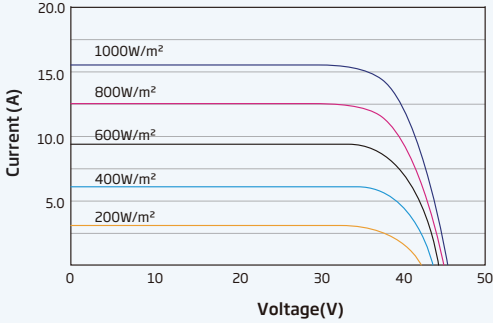

P-V CURVES OF PV MODULE(565W)

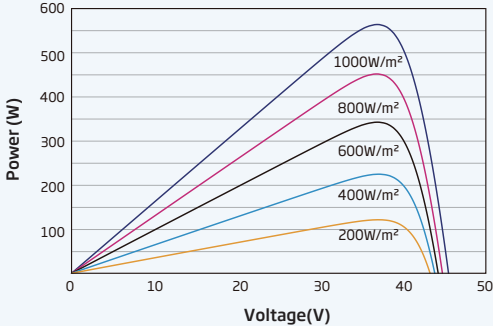

ELECTRICAL DATA (STC)

Peak Power Watts-P _{MAX} (Wp)*	555	560	565	570	575	580
Power Tolerance-P _{MAX} (W)	0 ~ +5					
Maximum Power Voltage-V _{MPP} (V)	37.2	37.4	37.7	37.9	38.2	38.4
Maximum Power Current-I _{MPP} (A)	14.92	14.96	14.99	15.03	15.07	15.10
Open Circuit Voltage-V _{OC} (V)	44.8	45.0	45.2	45.5	45.7	46.0
Short Circuit Current-I _{SC} (A)	15.91	15.95	16.00	16.05	16.08	16.11
Module Efficiency η _m (%)	20.5	20.7	20.9	21.1	21.3	21.5

STC: Irradiance 1000W/m2, Cell Temperature 25°C, Air Mass AM1.5. *Measuring tolerance: ±3%.

ELECTRICAL DATA (NOCT)

Maximum Power-P _{MAX} (Wp)	419	423	427	431	435	438
Maximum Power Voltage-V _{MPP} (V)	34.5	34.7	34.9	35.1	35.4	35.6
Maximum Power Current-I _{MPP} (A)	12.14	12.18	12.23	12.26	12.30	12.32
Open Circuit Voltage-V _{OC} (V)	42.2	42.4	42.6	42.8	43.0	43.3
Short Circuit Current-I _{SC} (A)	12.82	12.85	12.89	12.93	12.96	12.98

NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

MECHANICAL DATA

Solar Cells	Monocrystalline
No. of cells	132 cells
Module Dimensions	2384×1134×35 mm (93.86×44.65×1.38 inches)
Weight	29.6 kg (65.3 lb)
Glass	3.2 mm (0.13 inches), High Transmission, AR Coated Heat Strengthened Glass
Encapsulant material	EVA/POE
Backsheet	White
Frame	35mm(1.38 inches) Anodized Aluminium Alloy
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm² (0.006 inches²), Portrait: 280/280 mm(11.02/11.02 inches) Length can be customized
Connector	MC4 EV02 / TS4*

*Please refer to regional datasheet for specified connector.

TEMPERATURE RATINGS

NOCT(Nominal Operating Cell Temperature)	43°C (±2°C)
Temperature Coefficient of P _{MAX}	- 0.34%/°C
Temperature Coefficient of V _{OC}	- 0.25%/°C
Temperature Coefficient of I _{SC}	0.04%/°C

MAXIMUM RATINGS

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC (IEC) 1500V DC (UL)
Max Series Fuse Rating	30A

WARRANTY

12 year Product Workmanship Warranty
25 year Power Warranty
2% first year degradation
0.55% Annual Power Attenuation

(Please refer to product warranty for details)

PACKAGING CONFIGURATION

Modules per box: 31 pieces
Modules per 40' container: 620 pieces

Quadro de Assinaturas

Este documento foi assinado eletronicamente por:

Carlos Antonio Novais de Sousa
Gerente da GEPRO - Assinado em 23/07/2024



Sua autenticidade pode ser verificada no Portal do TCE/BA através do QRCode ou endereço <https://www.tce.ba.gov.br/autenticacaocopia>, digitando o código de autenticação: K0OTIXMJE2