


ESCALA: 1/1000

PERFIL LONGITUDINAL

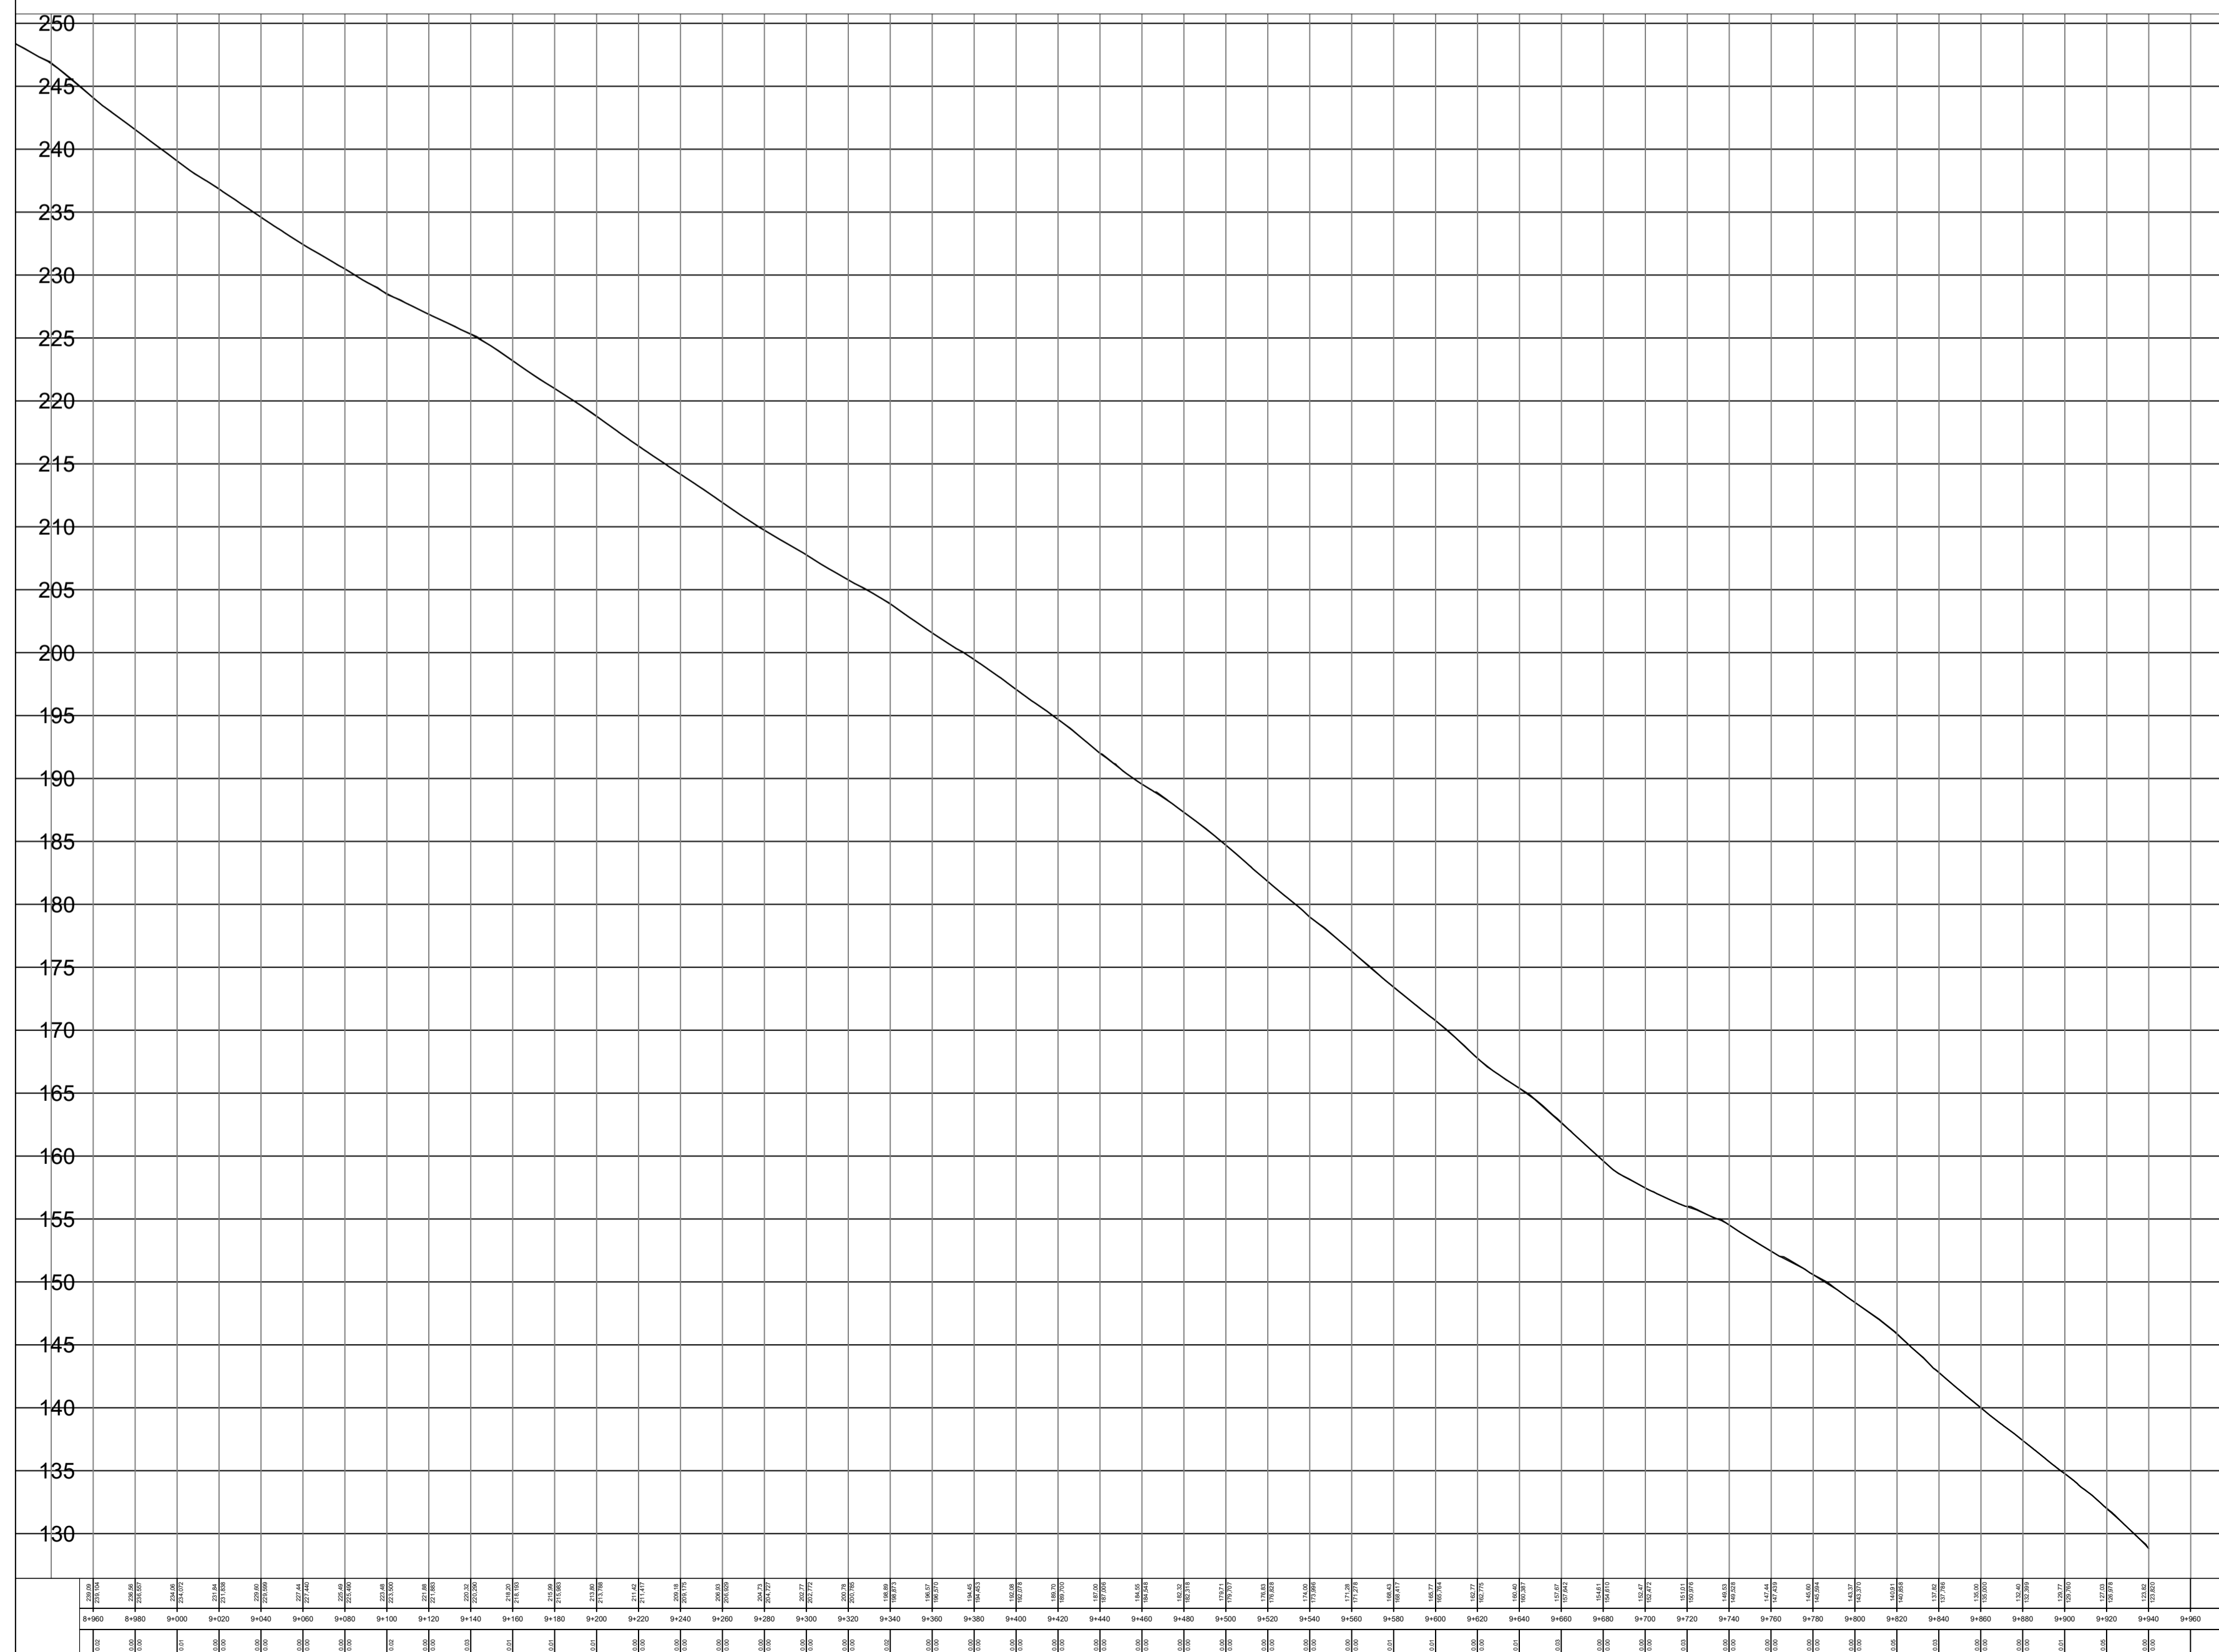

VOLUME PARCIAL
8+960 ATÉ 9+740

Estaca	Área de Corte (m²)	Área de Aterro (m²)	Volume de Corte (m³)	Volume de Aterro (m³)	Vol. Acum. (m³)	Volume Aterro Acum. (m³)	Volume Líquido (m³)
8+960.00	3.63	0.00	119.38	0.00	20725.48	233.45	20492.03
8+980.00	3.35	0.00	97.40	0.00	20822.88	233.45	20589.43
8+1000.00	3.77	0.00	99.22	0.00	20922.10	233.45	20688.66
8+1020.00	3.64	0.00	103.69	0.02	21025.80	233.47	20792.33
8+1040.00	3.45	0.00	98.77	0.03	21124.57	233.50	20891.07
8+1060.00	3.02	0.00	90.83	0.00	21215.39	233.50	20981.89
8+1080.00	2.89	0.00	83.38	0.00	21298.77	233.50	21065.27
8+1100.00	3.78	0.00	93.39	0.00	21392.16	233.50	21158.66
8+1120.00	4.04	0.03	110.59	0.27	21502.76	233.77	21268.98
8+1140.00	3.32	0.00	102.94	0.29	21605.70	234.06	21371.64
8+1160.00	2.43	0.01	80.57	0.07	21686.27	234.13	21452.14
8+1180.00	2.71	0.00	72.18	0.06	21756.45	234.19	21524.26
8+1200.00	3.08	0.00	81.86	0.00	21840.31	234.19	21606.12
8+1220.00	2.75	0.00	81.51	0.00	21921.82	234.19	21687.62
8+1240.00	2.71	0.00	76.84	0.00	21998.65	234.19	21764.46
8+1260.00	2.98	0.00	79.86	0.00	22078.51	234.19	21844.32
8+1280.00	3.05	0.00	84.40	0.00	22162.91	234.19	21928.72
8+1300.00	3.30	0.00	88.84	0.00	22251.75	234.19	22017.56
8+1320.00	3.65	0.00	97.22	0.00	22348.98	234.19	22114.78
8+1340.00	3.65	0.00	102.15	0.00	22451.12	234.19	22216.63
8+1360.00	3.94	0.00	106.29	0.04	22557.41	234.24	22323.17
8+1380.00	3.07	0.01	98.85	0.13	22656.26	234.37	22421.89
8+1400.00	3.35	0.01	90.21	0.20	22746.46	234.57	22511.89
8+1420.00	2.85	0.02	86.02	0.26	22834.48	234.83	22599.65
8+1440.00	3.10	0.01	83.69	0.25	22918.18	235.08	22683.10
8+1460.00	5.12	0.46	114.96	4.89	23033.14	239.97	22793.17
8+1480.00	4.25	0.78	131.28	11.71	23164.41	251.67	22912.74
8+1500.00	3.81	1.43	112.22	21.29	23276.64	272.96	23003.67
8+1520.00	3.90	1.48	108.00	29.09	23384.63	302.05	23082.58
8+1540.00	3.32	0.33	101.08	18.14	23485.72	320.19	23165.52
8+1560.00	3.15	0.01	89.83	3.45	23575.55	323.64	23251.91
8+1580.00	3.44	0.05	92.44	0.62	23667.99	324.26	23343.73
8+1600.00	4.00	0.00	104.14	0.53	23772.14	324.80	23447.34
8+1620.00	3.68	0.00	107.48	0.00	23879.62	324.80	23554.82
8+1640.00	3.25	0.00	97.06	0.00	23976.67	324.80	23651.88
8+1660.00	4.20	0.00	104.21	0.00	24080.88	324.80	23756.08
8+1680.00	4.09	0.00	116.05	0.00	24196.93	324.80	23872.13
8+1700.00	3.92	0.00	112.83	0.00	24309.76	324.80	23984.96
8+1720.00	3.94	0.00	110.37	0.01	24420.12	324.80	24095.32
8+1740.00	2.93	0.00	96.20	0.01	24516.32	324.81	24191.52
8+1760.00	3.68	0.00	92.57	0.00	24608.89	324.81	24284.09
8+1780.00	3.27	0.05	97.48	0.57	24706.37	325.38	24380.99
8+1800.00	3.56	0.46	95.77	5.61	24802.15	330.98	24471.16
8+1820.00	4.98	1.09	119.51	15.51	24921.66	346.50	24575.16
8+1840.00	3.89	1.66	124.23	27.52	25045.89	374.01	24671.88
8+1860.00	3.34	1.95	101.08	37.98	25146.97	411.99	24734.99
8+1880.00	3.72	1.05	98.84	26.76	25245.82	448.75	24797.07
8+1900.00	2.78	0.06	90.58	12.31	25336.39	461.06	24875.33
8+1920.00	4.25	0.08	103.34	0.25	25439.74	461.31	24978.43
8+1940.00	4.91	0.06	125.21	0.21	25564.95	461.52	25103.43

————— PERFIL DE PROJETO
 - - - - - PERFIL PRIMITIVO

PREFEITURA MUNICIPAL DE DOIS LAJEADOS-RS		
PAVIMENTAÇÃO ESTRADA P/ COTIPORÃ		
PROJETO PAVIMENTAÇÃO		
Responsável Técnico:	Proprietário:	ESCALA: indicada
Felipi Vidori Engenheiro Civil CREA RS 238641	Prefeitura Municipal Dois Lajeados-RS	DATA: 21/05/2025
		P 03/05 A1